


REL9W-LED

120/277V

Catalog #:		Type
Project:		Date
Prepared by:		

Low profile LED Emergency Light-2x1W

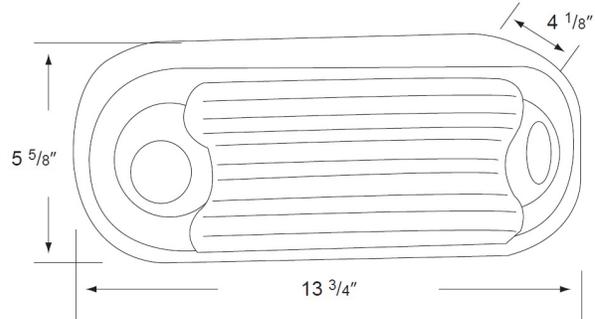

DESCRIPTION

An ultra slim profile, that comes in a standard or high output design with self-diagnostics and self-testing - make this one small emergency light, with lots of big features. The modern design is an attractive way to provide emergency lighting that increases safety, security, and visibility in commercial and industrial applications.

DESIGN FEATURES

Construction

- Wet location listed made of high impact thermoplastic and flame retardant housing
- Compact, Low profile - UV fiberglass Corrosion resistant enclosure
- Completely Self-contained
- Plastic Lens
- Light Emitting Diode

Electrical

- Operating temperature 50° F to 104°F
- 1000 Mah | 2 X 1W | 140Lm
- 120/277V
- Beam angle: 45°
- One 3.6V, 1000mAh Ni Cad battery
- Fully automatic operation w/integral recharging system. Low voltage disconnect protects battery from deep discharge
- Approximate battery life of 10 years
- Available 6500K

Installation

- Suitable for ceiling and wall mount

Dimensions (W x D x H)

- 13.75" x 4.125" x 5.625"

Finish

- White finish

Certifications

- ETLus for wet location
- 5 year limited warranty

Replacement Battery

- RB-1
- RBL-4



TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.


REL9W-LED

120/277V

Specification & Ordering

ORDERING		Example: REL9W-LED
Model #	Finish	
REL9W		
REL9W	WH : White	

REL9W-LED Center to Center Spacing

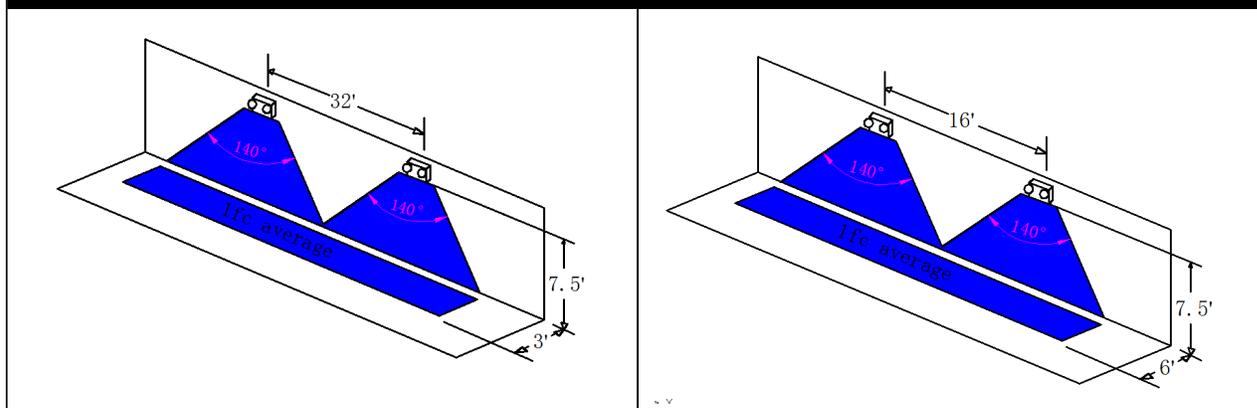

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.