

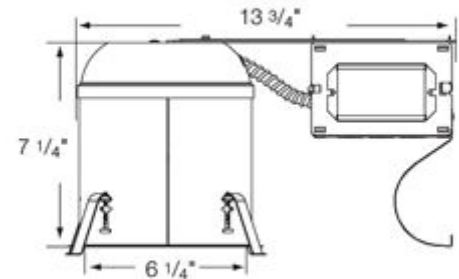


RP

LIGHTING • FANS



Type:
Project:
Comments:
Prepared By:

Part #	8156HRA-Exx (non dimmable) 8156HRA-Dxx (dimmable)
EM option	8156HRA-EM (emergency)
Description:	6" IC airtight compact fluorescent housing- remodel
Design Features	
Thermal Protection	Protected against misuse of insulation and improper wiring
Bar hangers	Pre installed allowing for position at any point w/in a 24" joist span. Can be turned 90° on plaster frame, & to fit T-bar spine w/out additional clamps for use in drop ceilings.
IC rating	IC rated for direct contact with non cellulose type insulation
Nails	Pre installed captive nails on bar hangers
J Box	Listed for feed through wiring (4 in-4 out) and five ½" knockouts & four non metallic cable knockouts w/ strain clamps
Connectors	3-port quick connectors
Lamp	Horizontally mounted DTT (Double twin tubes or TT- vertically mounted
Wattage	1x26W DTT, 1x32W TRT, 1x42W TRT
Ballast	HPF (High power factor) 4-pin type
Voltage	120/277V
Meets Washington State energy code for restricted air flow	



CONTACT US- Toll Free: 1-800-937-6925 Fax: 1-888-207-9509 or visit our website at www.rplighting.com

Trim Options

	Type	Item#	Finishes	O.D.
	Shower, Lexan, Fresnel Lens	8502FS	Wet location listed Metal trim ring available	8"
	Lexan Flat Opal Albalite Lens	8505AL	Wet location listed Metal trim ring available	8"
	Reflector	8507	Brushed Aluminum, white, clear	8"
	Lexan Drop Opal	8509DR	Wet location listed Metal trim ring available	8"
	Fresnel Lens w/White Baffle	8522	White	8"
	Regressed Drop Opal w/White Baffle	8537	White Wet location listed	8"
	Reflector, Clear w/Baffle	8543	White and Black	8"
	Splay	8546	White	8"
	Full Cone Baffle	8512WH	White and Black	8"

Additional Information

1. Adjusts to fit up to 1-1/4" ceiling thickness.
2. Optional Emergency option backup unit provides 90 minutes of illumination when normal power source fails.
3. 7-1/4" height allows use in 2"x8" joist construction.