





RP

LIGHTING • FANS


Type:
Project:
Comments:
Prepared By:

<b>Part #</b>	<b>8195HA</b>
Category #:	8195
Description:	5" IC rated Airtight Compact fluorescent housing
<b>Design Features</b>	
Thermal Protection	Protected against misuse of insulation and improper wiring
IC Rating	IC rated for direct contact w/ non cellulose type insulation
J Box	Listed for feed through wiring (4 in-4 out) and five ½" knockouts & four non metallic cable knockouts w/ strain clamps
Bar hangers	Pre installed allowing for position at any point w/in a 24" joist span. Can be turned 90° on plaster frame, & to fit T-bar spine w/out additional clamps for use in drop ceilings.
Nails	Pre installed captive nails on bar hangers
Wattage	13W, 18W, 26W
Lamp	G24/GX24
Voltage	120V
<b>Warranty</b>	<b>1 year limited warranty</b>
<b>Listing</b>	
ETL/UL	cULus for damp location
Meets Washington's State energy code for restricted airflow	

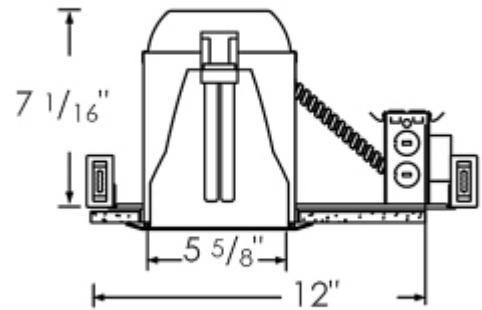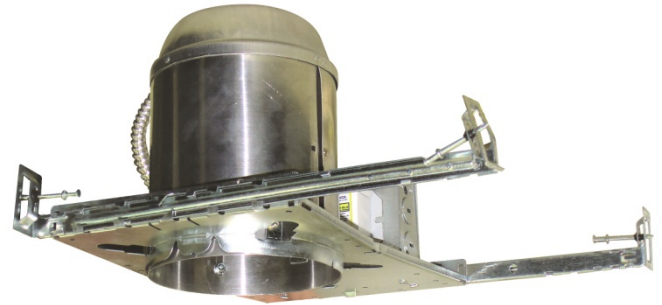

## Trim Options

---

	Type	Item#	Finishes	O.D.
	Reflector	8634	Brushed Aluminum	6 3/4"

## Additional Information

---

1. Adjusts to fit up to 1" ceiling thickness.
2. 7-1/16" height allows use in 2" x 8" joist construction.
3. Adjustable socket plate for proper positioning of different lamp types.