




RP

LIGHTING • FANS





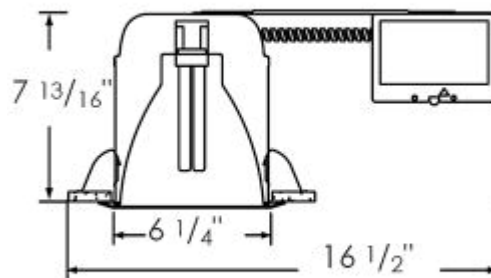





Type:
Project:
Comments:
Prepared By:

Part #	8196HRA
Description:	6" IC Airtight remodel fluorescent housing
Design Features	
Thermal Protection	Protected against misuse of insulation and improper wiring
Fit	Adjusts to fit up to 1" ceiling thickness. 7-13/16" height allows use in 2" x 8" joist construction.
IC Rating	IC rated for direct contact with non cellulose insulation
J Box	Listed for feed through wiring (4 in-4 out) and seven 1/2" knockouts & four non metallic cable knockouts w/ strain clamps
Connectors	3-port quick connectors
Ballast	Electronic HPF High Power Factor for 4 pin lamp
Lamps	Vertically mounted G24/Gx24
Wattage	1x13W, 1x18W & 26W
Voltage	120V
Warranty	1 year limited warranty
Listing	
ETL/UL	cULus for damp location
Meets Washington's State energy code for restricted airflow	



CONTACT US- Toll Free: 1-800-937-6925 Fax: 1-888-207-9509 or visit our website at www.rplighting.com

Trim Options

	Type	Item#	Finishes	O.D.
	Shower, Lexan, Fresnel Lens	8502FS	Wet location listed Metal trim ring available	8"
	Lexan Flat Opal Albalite Lens	8505AL	Wet location listed Metal trim ring available	8"
	Eyeball GU24	8506WH-F	Black and white	8"
	Reflector	8507	Clear, white, and brushed aluminum	8"
	Lexan Drop Opal	8509DR	Wet location listed Metal trim ring available	8"
	Fresnel Lens w/White Baffle	8522	White	8"
	Reflector, Clear w/Baffle	8543	Black and white	8"
	Splay	8546	White	8"
	Full Cone Baffle	8512WH	White and black	8"
	Reflector	8518	Clear, white, and brushed aluminum	8"