

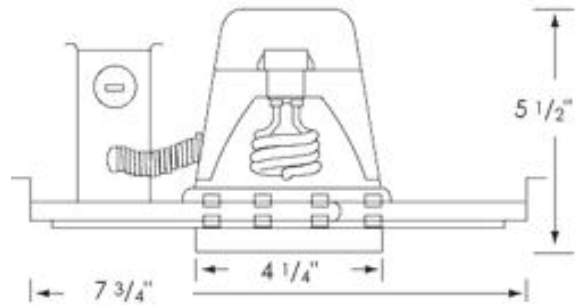


RP

LIGHTING • FANS



Type:
Project:
Comments:
Prepared By:

Part #	8214H
Category #:	8214
Product Category:	Recessed Fluorescent
Description:	4" IC rated Compact fluorescent housing
Design Features	
Thermal Protection	Protected against misuse of insulation and improper wiring
IC Rating	IC rated for direct contact w/ non cellulose type insulation
J Box	Listed for feed through wiring (4 in-4 out) and eight 1/2" knockouts
Bar hangers	Pre installed allowing for position at any point w/in a 24" joist span. Can be turned 90° on plaster frame, & to fit T-bar spine w/out additional clamps for use in drop ceilings.
Nails	Pre installed captive nails on bar hangers
Wattage	13W, 18W
Lamp	GU24
Voltage	120V-60Hz
Warranty	1 year limited warranty
Listing	
ETL/UL	cETLus for damp location
Meets Washington's State energy code for restricted airflow	



Trim Options



	Type	Item#	Finishes	O.D.
	Baffle 13W, CFL	8701	Black and white Optional BA, BK Rings	5"
	Shower Trim, Fresnel 13W, CFL	8702FS	Wet location listed	5"

Additional Information

1. Adjusts to fit up to 1" ceiling thickness.
2. 5-1/2" height allows use in 2" x 6" joist construction.
3. Adjustable socket plate for proper positioning of different lamp types.