


4107

120V-277V Universal Voltage

Catalog #:		Type
Project:		Date
Prepared by:		

2x2 LED Flat Panel

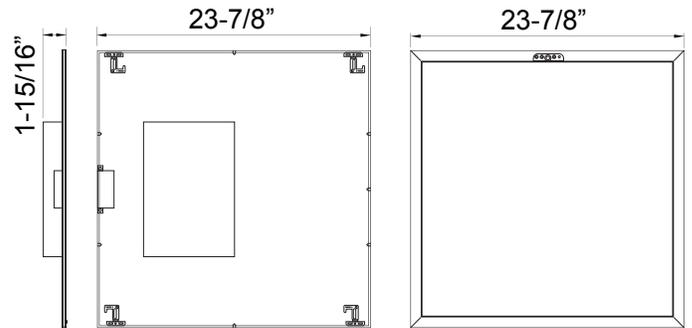

2x2 LED Flat Panel

DESCRIPTION

Panel lights that are an economical, lightweight and easy to use solution that installs easily into standard lay-in grid ceilings. These panels are ready for use in a variety of both commercial and residential locations including kitchen, basements, office buildings, schools, garages and recreation rooms.

DESIGN FEATURES

Construction

- Heavy duty, white powder coated aluminum frame with hinged lens panel
- Low-profile edge-lit design
- Damp listed

Electrical

- Optional SmartSensor Technology
- 120V-277V Universal Voltage
- Full range 0-10V dimming
- IC rated for direct contact with insulation
- Long-life LEDs and electrical driver
- 50,000 hour projected life
- Available 4000K CCT | 80 CRI
- 40W | 4300lms | 107.5lm/W
- Beam angle 113°

Installation

- Mounting hooks provide additional option for suspended chain or cable mount

Lens

- High performance lens is engineered to provide optimal lumen output with a uniform, glare-free distribution

Accessories (sold separately)

- 4112HC - Hanging Cable Kit
- 22FK - 2x2 Flange Kit
- 22SMK - Surface Mount Kit

Certifications

- 5 year limited warranty
- UL Listed
- DLC Qualified

ORDERING GUIDE

Example: 4107WH-SS-EM

Model #	Sensor Option	EM Option
4107WH		
4107WH	- blank : no SmartSensor - SS : SmartSensor	-blank : no EM -EM : add emergency option

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.

8/17/2020 R1



RP LIGHTING • FANS