

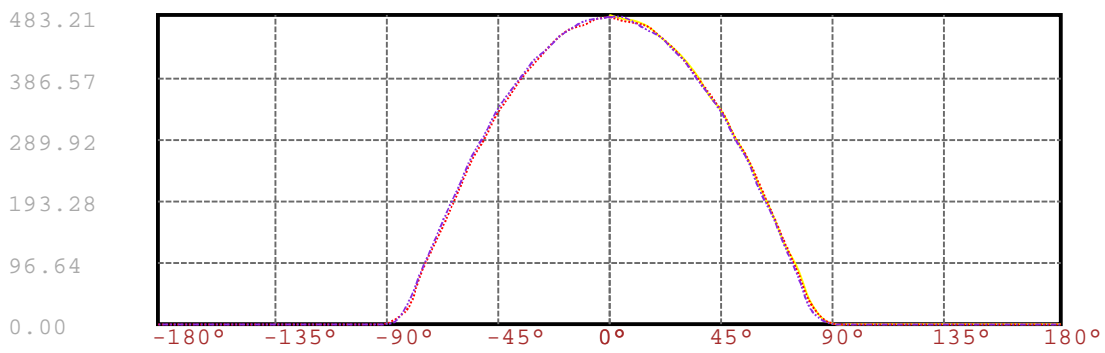



(°)	Average I(cd)	Zonal F(lm)	Sum F(lm)	Eff Flux(lm)	Eff Sum(lm)
0.0	480.886	.000	.000	.000%	.000%
5.0	477.122	11.453	11.453	.000%	.000%
10.0	471.584	33.938	45.391	.000%	.000%
15.0	462.329	55.399	100.790	.000%	.000%
20.0	448.760	75.087	175.877	.000%	.000%
25.0	431.395	92.312	268.189	.000%	.000%
30.0	410.548	106.549	374.737	.000%	.000%
35.0	385.716	117.256	491.993	.000%	.000%
40.0	359.520	124.337	616.330	.000%	.000%
45.0	328.413	127.376	743.706	.000%	.000%
50.0	293.385	125.644	869.350	.000%	.000%
55.0	257.102	119.694	989.044	.000%	.000%
60.0	215.972	109.350	1098.394	.000%	.000%
65.0	170.073	93.848	1192.242	.000%	.000%
70.0	125.053	74.728	1266.970	.000%	.000%
75.0	79.939	53.582	1320.552	.000%	.000%
80.0	33.271	30.292	1350.843	.000%	.000%
85.0	7.749	11.146	1361.990	.000%	.000%
90.0	1.035	2.405	1364.395	.000%	.000%
95.0	.110	.314	1364.708	.000%	.000%
100.0	.016	.034	1364.743	.000%	.000%
105.0	.063	.021	1364.764	.000%	.000%
110.0	.063	.033	1364.796	.000%	.000%
115.0	.031	.024	1364.820	.000%	.000%
120.0	.063	.023	1364.843	.000%	.000%
125.0	.063	.029	1364.872	.000%	.000%
130.0	.094	.034	1364.906	.000%	.000%
135.0	.031	.025	1364.932	.000%	.000%
140.0	.125	.029	1364.961	.000%	.000%
145.0	.063	.031	1364.992	.000%	.000%
150.0	.031	.014	1365.006	.000%	.000%
155.0	.063	.012	1365.018	.000%	.000%
160.0	.063	.013	1365.031	.000%	.000%
165.0	.047	.009	1365.040	.000%	.000%
170.0	.047	.006	1365.046	.000%	.000%
175.0	.047	.003	1365.049	.000%	.000%
180.0	.031	.001	1365.050	.000%	.000%

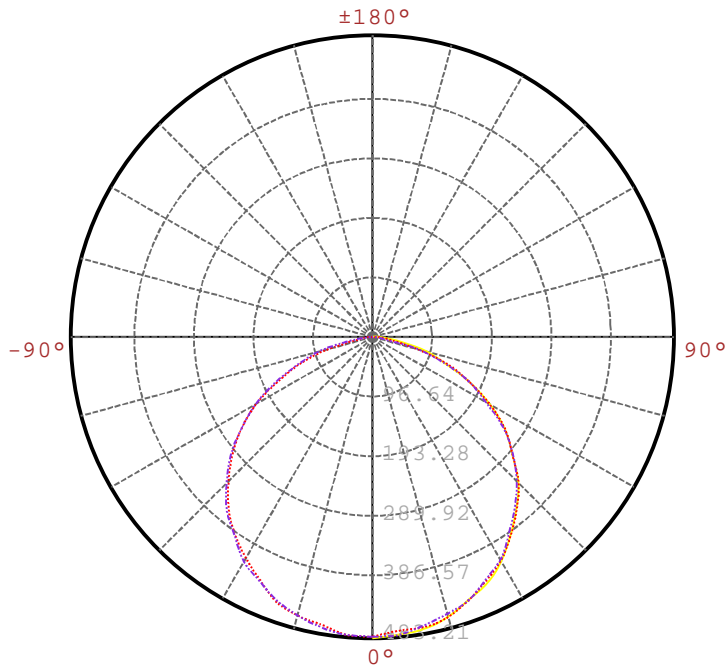


C30(Max) : —————
C0/C180 :
C90/C270 : -.-.-.-

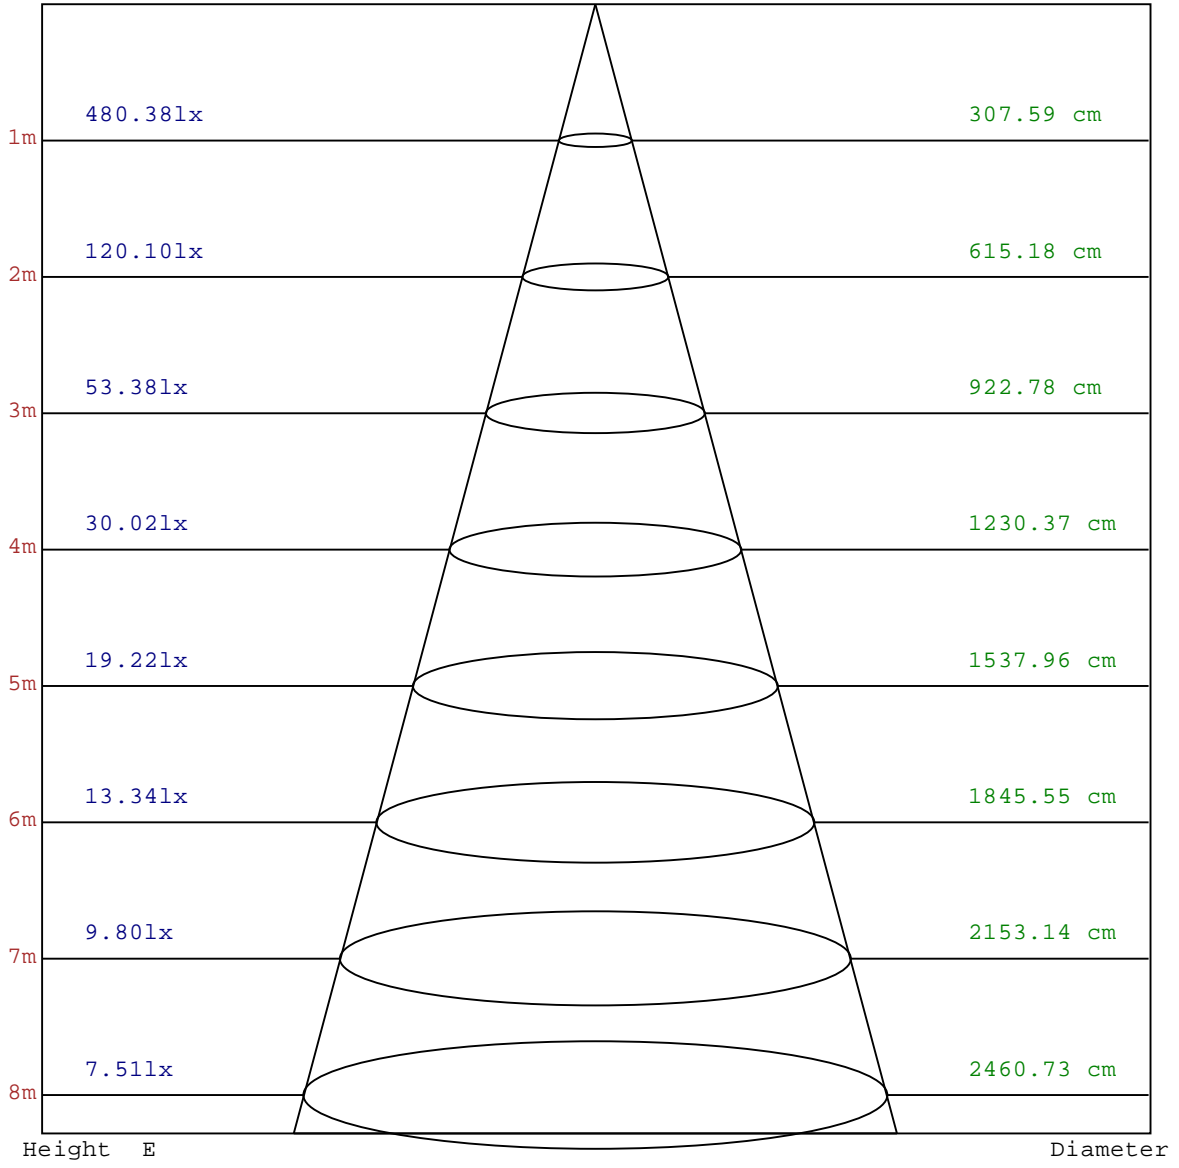


Beam Angle:113.94°

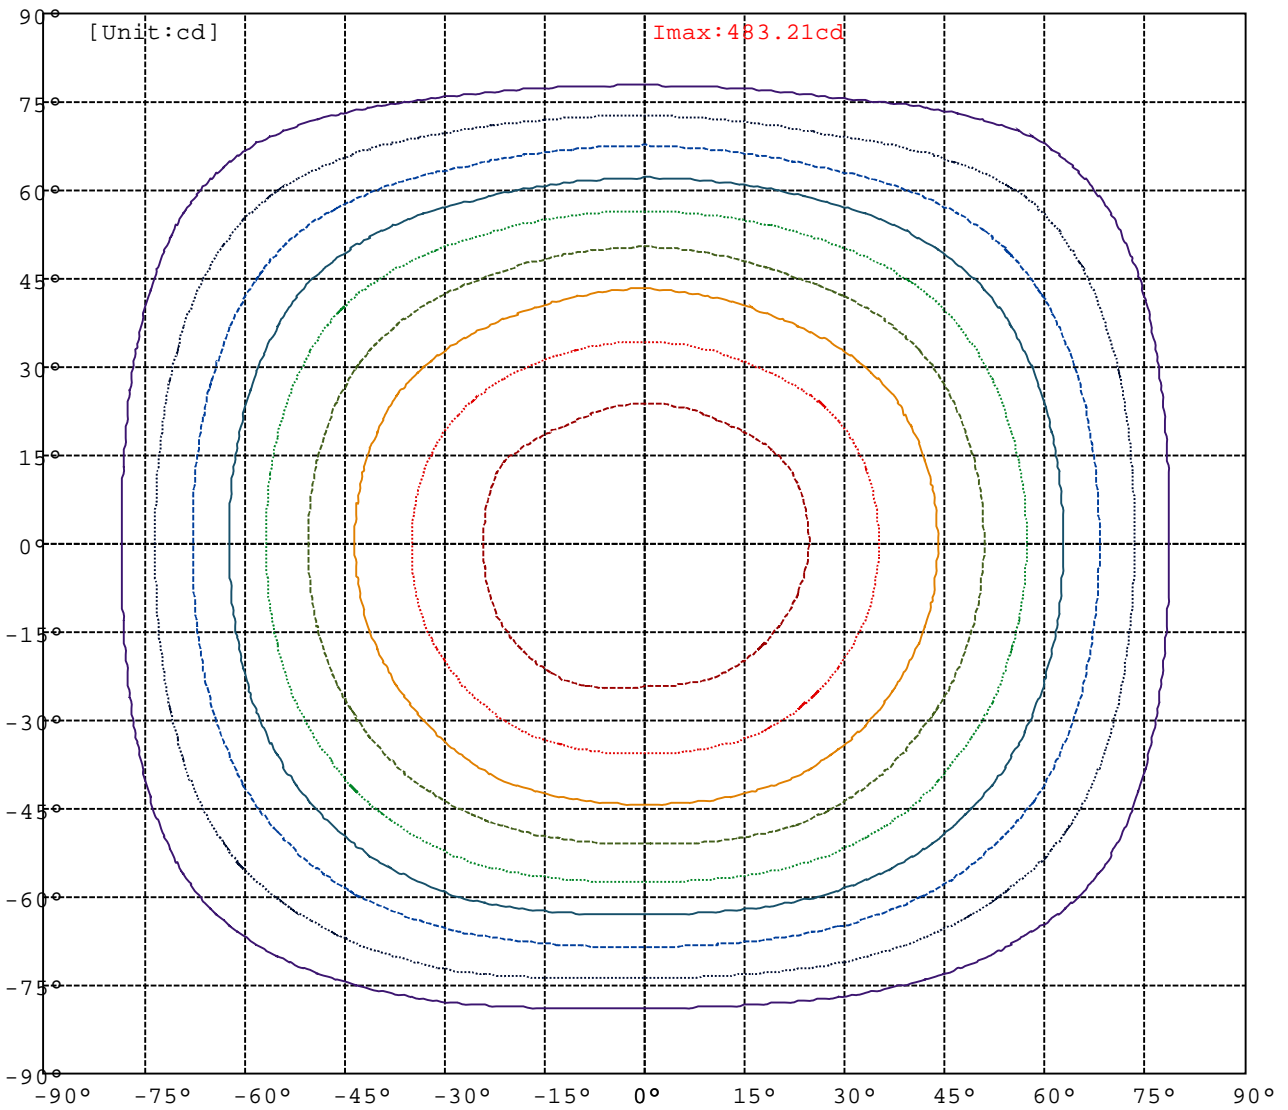


(10%Imax)	48.1411	—
(20%Imax)	96.2823	⋯
(30%Imax)	144.423	- - -
(40%Imax)	192.565	—
(50%Imax)	240.706	⋯
(60%Imax)	288.847	- - -
(70%Imax)	336.988	—
(80%Imax)	385.129	⋯
(90%Imax)	433.27	- - -

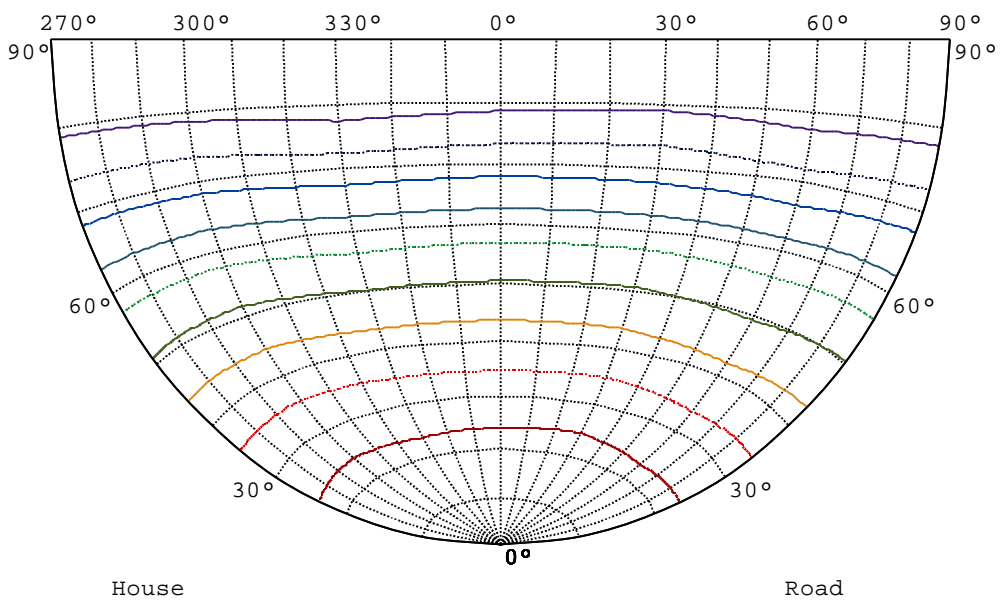

	Imax:483.21cd	
(10%Imax)	48.3208	———
(20%Imax)	96.6416
(30%Imax)	144.962	- - - - -
(40%Imax)	193.283	———
(50%Imax)	241.604
(60%Imax)	289.925	- - - - -
(70%Imax)	338.246	———
(80%Imax)	386.566
(90%Imax)	434.887	- - - - -

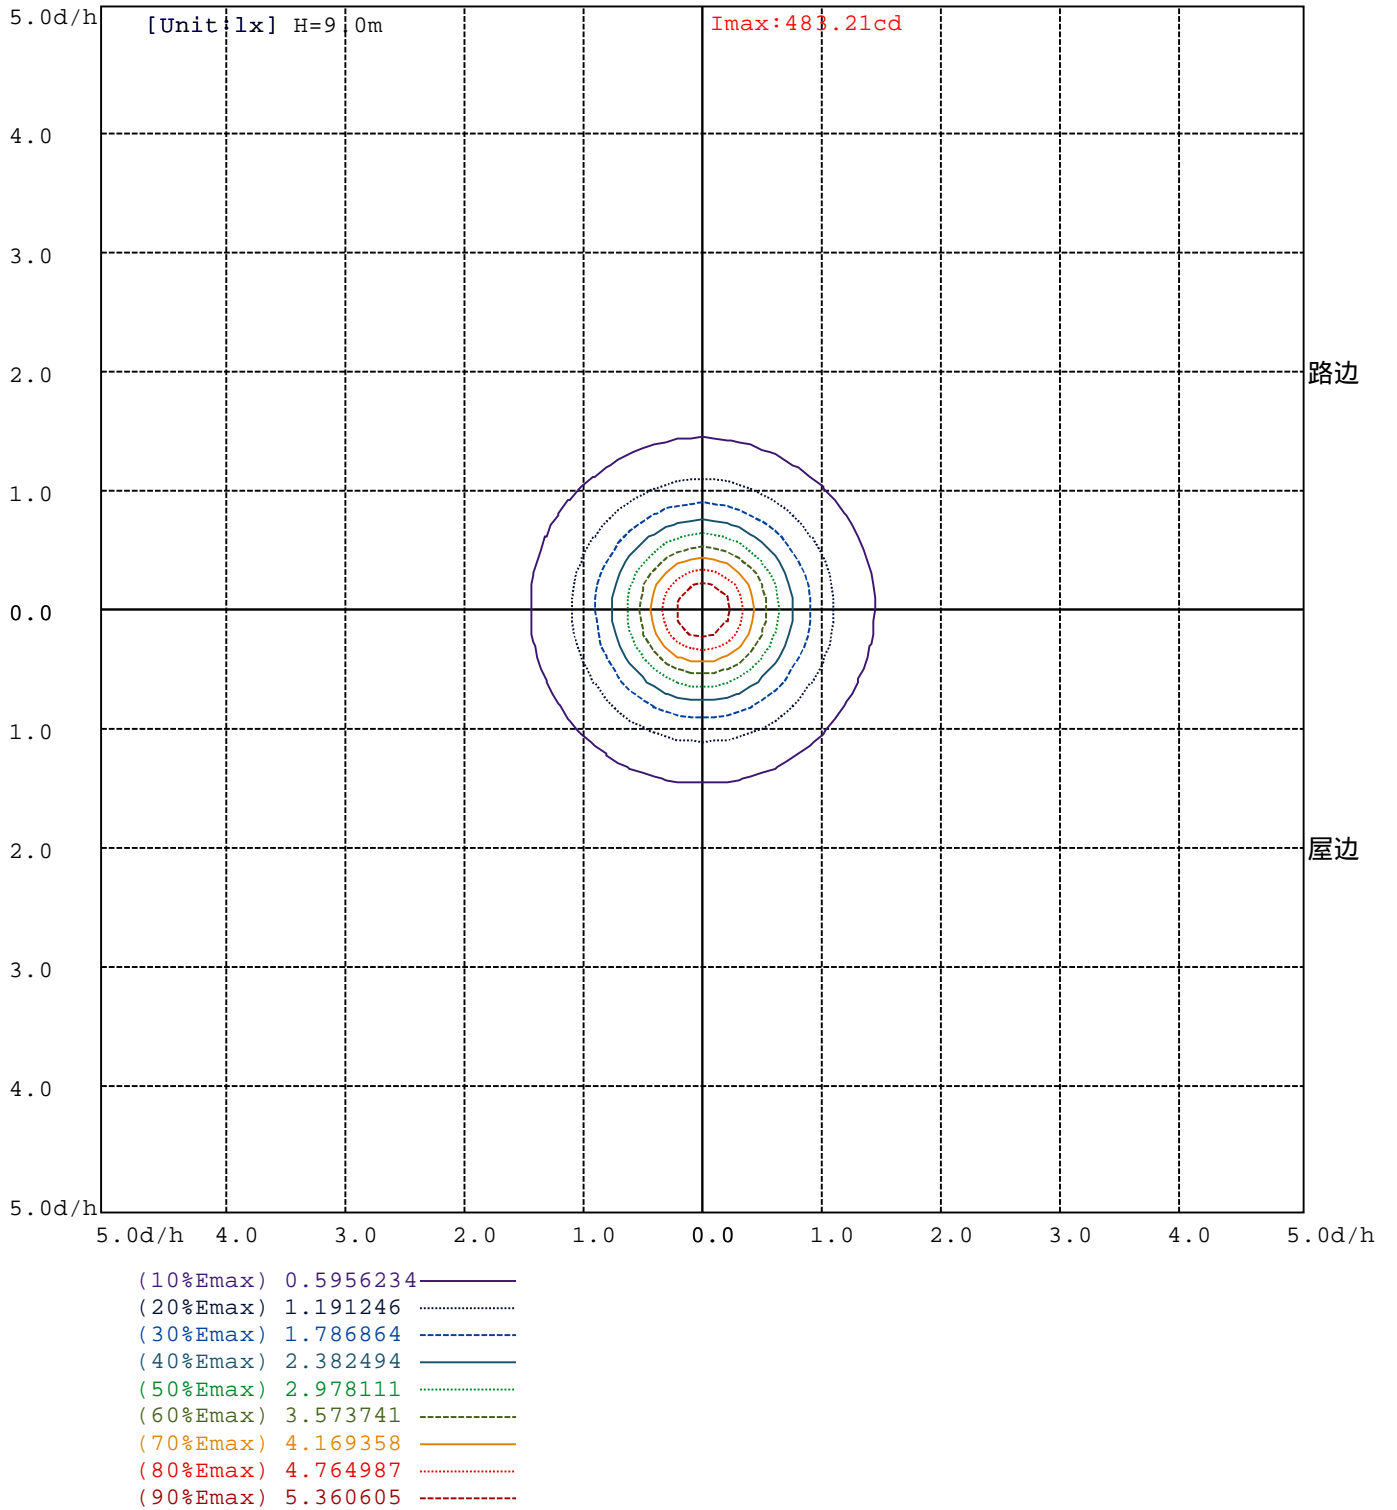

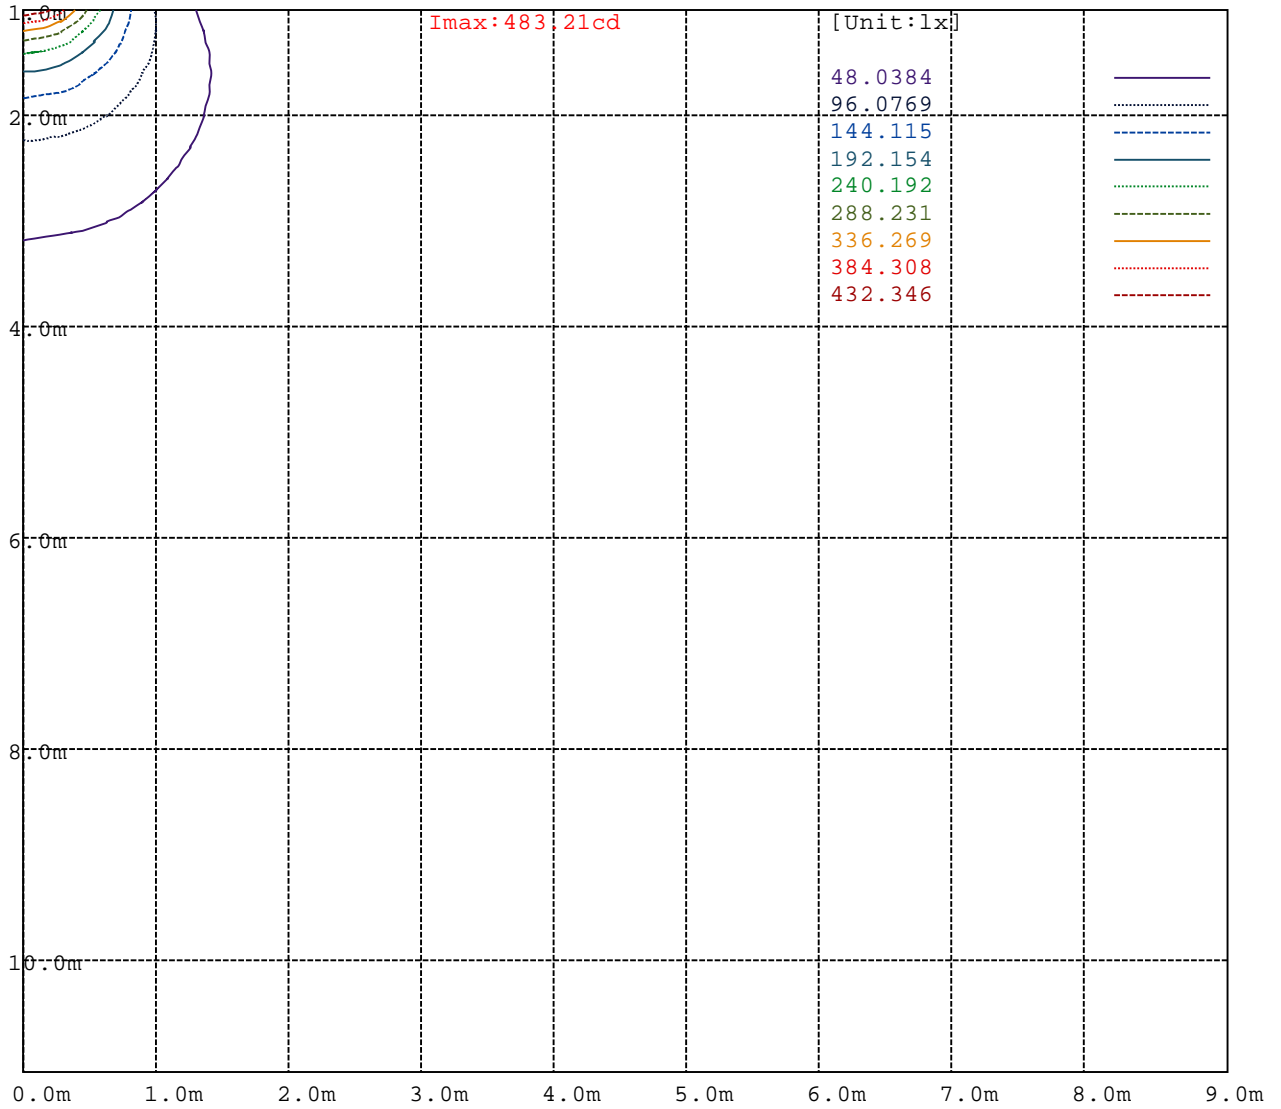


Luminance Table

	45	50	55	60	65	70	75	80	85
C0	57744	56617	55589	53869	49985	46272	38520	25428	12799
C90	57186	56147	54697	51917	49325	44437	35467	19807	9866

Glare Table

Glare	Quality	Service Values Illuminance(lx)							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

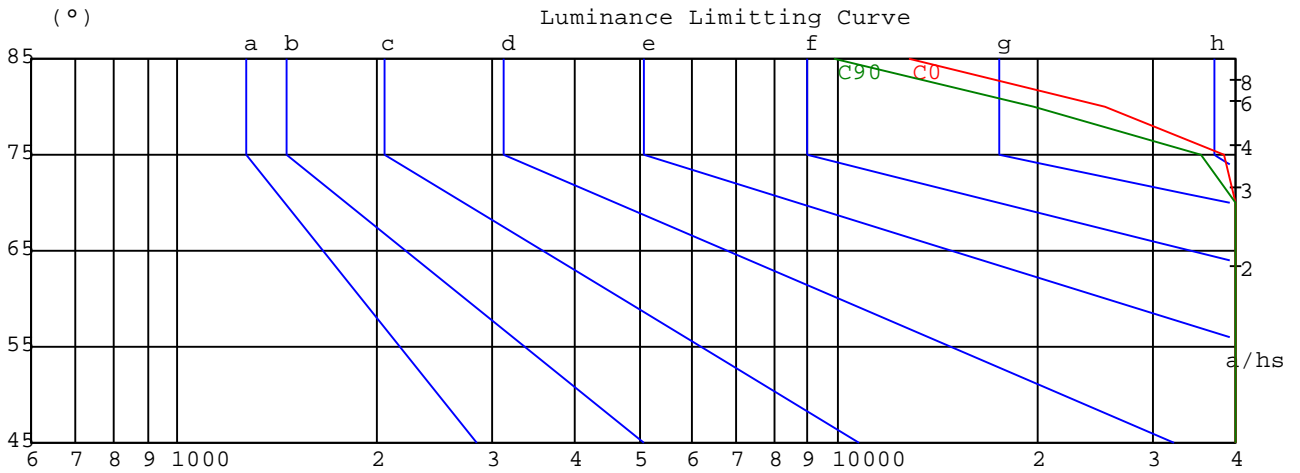

Intensity data(cd)

Page: 10 Total:10

C/ (°)	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0
360.0	480.38	474.17	472.29	464.76	450.27	431.82	410.92	385.32	360.10	330.73
330.0	481.14	474.55	469.84	462.50	446.31	430.69	409.23	386.27	358.97	329.42
300.0	479.44	476.62	475.49	461.18	452.34	432.57	415.63	389.65	367.06	335.06
270.0	480.01	478.50	473.42	461.56	450.27	429.94	414.69	388.34	363.11	332.24
240.0	480.57	480.76	474.74	464.57	450.08	437.84	414.31	391.54	365.75	334.69
210.0	483.21	479.63	473.80	461.75	449.14	433.89	409.80	387.96	357.84	324.71
180.0	480.38	478.13	467.77	463.25	450.45	429.18	407.54	384.38	358.41	326.22
150.0	481.14	474.36	468.53	461.00	447.63	433.89	408.48	385.51	361.79	328.29
120.0	479.44	476.24	470.22	461.56	445.37	425.98	405.47	381.75	355.02	320.95
90.0	480.01	480.01	470.22	458.36	448.76	429.00	410.17	381.56	355.77	327.53
60.0	481.70	474.93	467.40	462.13	444.43	428.62	406.22	379.30	352.19	320.57
30.0	483.21	477.56	475.30	465.33	450.08	433.32	414.12	387.02	358.22	330.55
0.0	480.38	474.17	472.29	464.76	450.27	431.82	410.92	385.32	360.10	330.73

C/ (°)	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0	90.0	95.0
360.0	294.78	258.26	218.17	171.11	128.19	80.75	35.77	9.04	0.94	0.00
330.0	291.02	251.67	213.65	167.53	120.28	69.27	25.79	5.46	0.56	0.00
300.0	300.99	265.04	221.18	177.13	128.94	84.33	34.82	8.66	1.32	0.19
270.0	295.72	260.71	217.98	174.50	130.64	84.71	37.84	6.40	1.13	0.38
240.0	298.36	264.85	227.39	181.46	132.90	94.31	42.92	11.67	1.51	0.38
210.0	294.03	257.13	214.40	169.23	125.74	82.26	34.82	9.04	1.13	0.00
180.0	291.39	254.87	211.77	166.21	125.74	80.94	31.06	8.28	1.13	0.00
150.0	294.40	259.58	221.37	169.23	129.70	79.44	35.39	8.85	1.32	0.00
120.0	288.00	251.86	208.19	162.64	118.40	74.35	26.35	5.84	0.75	0.00
90.0	292.33	254.12	210.26	168.85	123.11	74.35	27.86	6.96	0.94	0.19
60.0	284.62	249.23	211.20	162.26	112.38	68.52	26.92	4.33	0.94	0.19
30.0	294.97	257.89	216.10	170.73	124.61	86.02	39.72	8.47	0.75	0.00
0.0	294.78	258.26	218.17	171.11	128.19	80.75	35.77	9.04	0.94	0.00

C/ (°)	100.0	105.0	110.0	115.0	120.0	125.0	130.0	135.0	140.0	145.0
360.0	0.00	0.19	0.00	0.00	0.00	0.19	0.38	0.00	0.19	0.00
330.0	0.00	0.19	0.00	0.00	0.19	0.00	0.00	0.00	0.19	0.19
300.0	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.00	0.00	0.00
270.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
240.0	0.00	0.00	0.19	0.00	0.00	0.19	0.19	0.00	0.00	0.00
210.0	0.19	0.00	0.19	0.00	0.19	0.19	0.00	0.00	0.19	0.19
180.0	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.00	0.19	0.00
150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.00	0.00	0.19
120.0	0.00	0.19	0.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90.0	0.00	0.00	0.00	0.19	0.19	0.00	0.00	0.19	0.38	0.00
60.0	0.00	0.19	0.19	0.19	0.00	0.00	0.00	0.19	0.19	0.00
30.0	0.00	0.00	0.00	0.00	0.19	0.19	0.00	0.00	0.19	0.19
0.0	0.00	0.19	0.00	0.00	0.00	0.19	0.38	0.00	0.19	0.00

C/ (°)	150.0	155.0	160.0	165.0	170.0	175.0	180.0
360.0	0.00	0.00	0.19	0.00	0.00	0.00	0.19
330.0	0.00	0.00	0.00	0.00	0.19	0.19	0.00
300.0	0.19	0.00	0.19	0.00	0.19	0.00	0.00
270.0	0.00	0.19	0.00	0.19	0.00	0.00	0.00
240.0	0.00	0.19	0.19	0.00	0.00	0.00	0.00
210.0	0.00	0.19	0.00	0.19	0.00	0.00	0.00
180.0	0.00	0.00	0.00	0.00	0.00	0.00	0.19
150.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120.0	0.00	0.00	0.19	0.19	0.00	0.00	0.00
90.0	0.19	0.19	0.00	0.00	0.19	0.19	0.00
60.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30.0	0.00	0.00	0.00	0.00	0.00	0.19	0.00
0.0	0.00	0.00	0.19	0.00	0.00	0.00	0.19