




RP

LIGHTING • FANS

Type:
Project:
Comments:
Prepared By:

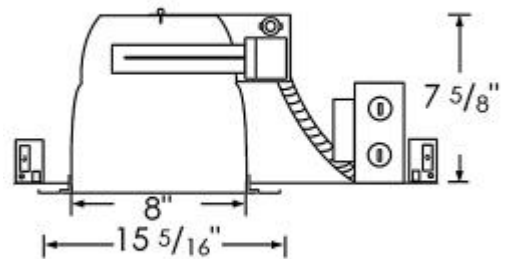

<b>Part #</b>	<b>8130H-Exx (non dimmable) 8130H-Dxx (dimmable)</b>
<b>EM option</b>	<b>8130H-EM (emergency)</b>
Description:	8" Horizontal compact fluorescent housing
<b>Design Features</b>	
Thermal Protection	Protected against misuse of insulation and improper wiring
Bar hangers	Pre installed allowing for position at any point w/in a 24" joist span. Can be turned 90° on plaster frame, & to fit T-bar spine w/out additional clamps for use in drop ceilings.
Nails	Pre installed captive nails on bar hangers
J Box	Listed for feed through wiring (4 in-4 out) and five ½" knockouts & four non metallic cable knockouts w/ strain clamps
Connectors	3-port quick connectors
Lamp	Horizontally mounted DTT (Double twin tubes or TT)
Wattage	13W, 18W, 26W, 32W, 42W
Ballast	HPF (High power factor) electronic for 4-pin type
Voltage	120/277V
<b>Listing</b>	
ETL/UL	cULus for damp location



CONTACT US- Toll Free: 1-800-937-6925 Fax: 1-888-207-9509 or visit our website at [www.rplighting.com](http://www.rplighting.com)

## Trim Options

---

	Type	Item#	Finishes	O.D.
	Reflector, Anodized	8591	White and Clear	9 1/2"
	Reflector, Clear w/White Baffle and Fresnel Lens	8595	White	9 1/2"

## Additional Information

---

1. Adjusts to fit up to 1" ceiling thickness.
2. 7-5/8" height allows for use in 2"x8" joist construction.
3. Optional Emergency option backup unit provides 90 minutes of illumination when normal power source fails.