

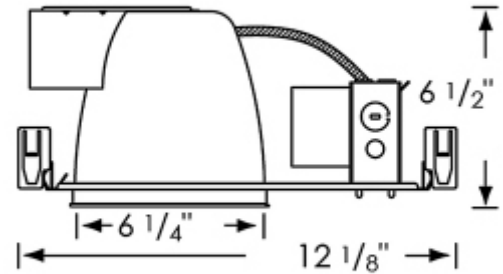


RP




LIGHTING • FANS

Type:
Project:
Comments:
Prepared By:

Part #	8133H-Exx (non dimmable) 8133H-Dxx (dimmable)
EM	8133H-EM (Emergency option)
Description:	6" Horizontal fluorescent housing
Design Features	
Thermal Protection	Protected against misuse of insulation and improper wiring
Bar hangers	Pre installed allowing for position at any point w/in a 24" joist span. Can be turned 90° on plaster frame, & to fit T-bar spine w/out additional clamps for use in drop ceilings.
Nails	Pre installed captive nails on bar hangers
IC Rating	Non-IC
J Box	Listed for feed through wiring (4 in-4 out) and five ½" knockouts & four non metallic cable knockouts w/ strain clamps
Connectors	3-port quick connectors
Lamp	Horizontally mounted DTT (Double twin tubes)
Wattage	1x13W, 1x18W, & 1x26W
Ballast	HPF (High power factor) electronic for 4-pin type
Voltage	120/277V
Warranty	1 year limited warranty
Listing	
ETL/UL	cULus for damp location



Trim Options

	Type	Item#	Finishes	O.D.
	Reflector	8660	Clear	8"
	Reflector, Clear w/White Baffle	8663	White	8"
	Reflector w/Wall Wash	8664	White	8"

Additional Information

1. Adjusts to fit up to 1" ceiling thickness.
2. 6-1/2" height allows use in 2" x 8" joist construction.
3. Optional preinstalled emergency backup unit provides 90 minutes of illumination when normal power source fails.