

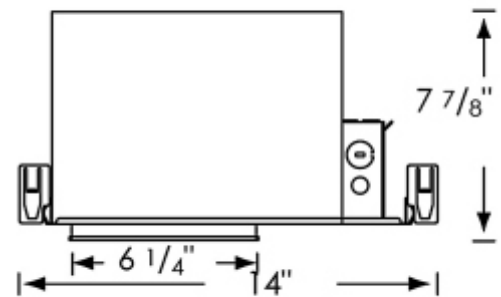


RP




LIGHTING • FANS

Type:
Project:
Comments:
Prepared By:

<b>Part #</b>	<b>8133HIC-Exx (Non dimmable) 8133HIC-Dxx (Dimmable)</b>
<b>EM</b>	<b>8133HIC-EM (Emergency option)</b>
Description:	6" IC Horizontal compact fluorescent housing
<b>Design Features</b>	
Thermal Protection	Protected against misuse of insulation and improper wiring
Bar hangers	Pre installed allowing for position at any point w/in a 24" joist span. Can be turned 90° on plaster frame, & to fit T-bar spine w/out additional clamps for use in drop ceilings.
Nails	Pre installed captive nails on bar hangers
Wall	Double wall construction
IC Rating	IC rate for direct contact with non-cellulose insulation
J Box	Listed for feed through wiring (4 in-4 out) and five ½" knockouts & four non metallic cable knockouts w/ strain clamps
Connectors	3-port quick connectors
Lamp	Horizontally mounted DTT (Double twin tubes)
Wattage	1x13W, 1x18W, & 1x26W
Ballast	HPF (High power factor) electronic for 4-pin type
Voltage	120/277V
ETL/UL	cULus for damp location



## Trim Options

	Type	Item#	Finishes	O.D.
	Reflector	8660	Clear	8"
	Reflector, Clear w/White Baffle	8663	White	8"
	Reflector w/Wall Wash	8664	White	8"

## Additional Information

1. Adjusts to fit up to 1" ceiling thickness.
2. 7-7/8" height allows use in 2" x 8" joist construction.
3. Optional preinstalled emergency backup unit provides 90 minutes of illumination when normal power source fails.