




RP

LIGHTING • FANS



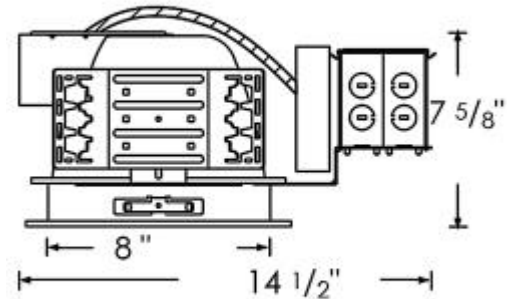

Type:
Project:
Comments:
Prepared By:

Part #	8145H-E2xx (non dimmable) 8145H-D2xx (dimmable)
Description:	8" Architectural compact fluorescent housing
Design Features	
Thermal Protection	Protected against misuse of insulation and improper wiring
IC Rating	Non-IC
J Box	Listed for feed through wiring (4 in-4 out) and eight ½" knockouts & four non metallic cable knockouts w/ strain clamps
Connectors	3-port quick connectors
Lamp	Horizontally mounted DTT (Double twin tubes)
Wattage	2x18W, 2x26W, 2x32W, 2x42W
Ballast	HPF (High power factor) electronic for 4-pin type
Voltage	120/277V
Warranty	1 year limited warranty
Listing	
ETL/UL	cULus for damp location



CONTACT US- Toll Free: 1-800-937-6925 Fax: 1-888-207-9509 or visit our website at www.rplighting.com

Trim Options

	Type	Item#	Finishes	O.D.
	Reflector	8591CL	Clear	8"
	Reflector, Clear w/White Baffle	8595WH	White	8"
	Reflector w/Wall Wash	8596CL	Clear	8"
	Reflector, Clear w/ Cross Louver	8593CL	Clear	8"

Additional Information

1. Adjusts to fit up to 1" ceiling thickness.
2. C-channel bracket allows for vertical adjustment.