


RXL34 Series

120V/277V

Catalog #:		Type
Project:		Date
Prepared by:		

Recessed Edge-lit Exit Sign - Double Face

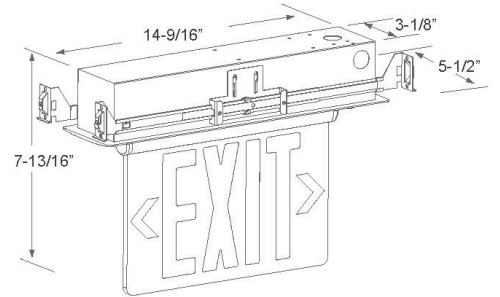

DESCRIPTION

When normal utility power fails, the internal solid-state transfer switch automatically connects the internal battery to the LED lamps, lighting a path of egress for no less than 90 minutes. When utility power is restored the battery is recharged by the onboard solid-state recharger. Full recharge is accomplished within 24 hours.

DESIGN FEATURES

Construction

- Completely self-contained
- Recessed, low-profile design
- Double mirrored finish faceplate
- Removable directional indicators included

Electrical

- 120/277V
- Operating temperature range: 10°C (50°F) to 40°C (104°F)
- Contains 4.8V Ni-cd rechargeable battery Energy consumption of less than 5 watts. Estimated 25 year LED lamp life
- 90 minutes of illumination in case of power failure
- Automatic, low voltage disconnect protects battery from deep discharge
- Fully automatic operation

Installation

- Included bar hangers allow the recessed housing to be positioned at any point within a 24" joist span
- Exit panel will pivot up to 90° for recessed wall or sloped ceiling installation

Dimensions (W x D X H)

- 14-9/16" x 5-1/2" x 7-13/16"

Finish

- RW Red with white housing
- RBA Red with brushed aluminum housing
- GW Green with white housing
- GBA Green with brushed aluminum housing

Certifications

- UL for damp location
- CEC Title 20 Compliant
- 5 year limited warranty

ORDERING GUIDE

Example: RXL34-RW

Model #	Finish
RXL34	
RXL34	RW : Red with white housing RBA : Red with brushed aluminum GW : Green with white housing GBA : Green with brushed aluminum



TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.

7/22/24 R2



RP LIGHTING · FANS

RXL34 - Recessed Edge-lit Exit - Double Face