


REL22 Series

120/277V

Catalog #:		Type
Project:		Date
Prepared by:		

Compact High Output Remote Head Capable Emergency

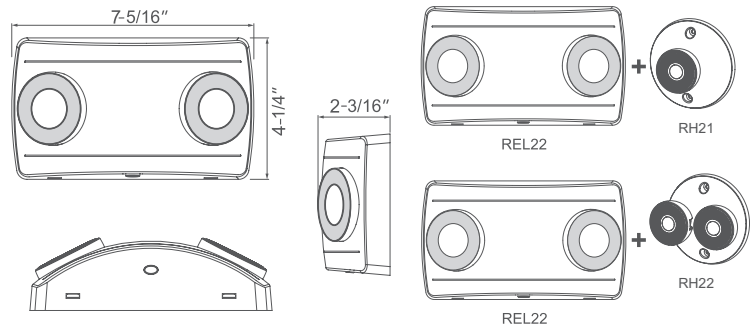

DESCRIPTION

Simple and compact, this high output emergency unit is very versatile with options for lenses for wide and narrow light distribution. The high output allows for remote head capability to run off of the base emergency unit.

DESIGN FEATURES

Construction

- White thermoplastic housing
- Adjustable Clear Lens Heads

Electrical

- 120/277V, 60Hz
- Standard Operating Temperature: 10°C (50°F) to 40°C (104°F)
- Adjustable Heads: 2 x 1.4W | 247 lms total
- 3.6V, 1500 mAh Ni-MH Battery
- 3.6V, 1W or 3.6V, 2W Remote Heads Available
- Manual test switch and LED indicator
- 90 minutes of illumination in case of power failure

Remote Head Compatibility

- RH17 - Single Wet Remote Head | 1 x 1W
- RH18 - Double Wet Remote Head | 2 x 1W
- RH21 - Single Wide Lens Remote Head | 1 x 1W
- RH21-N - Single Narrow Lens Remote Head | 1 x 1W
- RH22 - Double Wide Lens Remote Head | 1 x 1W
- RH22-N - Double Narrow Lens Remote Head | 1 x 1W

Installation

- Suitable for wall and ceiling mount
- Universal pattern knockouts on backplate for J-Box installation
- A wide focal lens for open area or a narrow focal lens for long pathway applications

Certifications

- UL Listed for damp location to UL924 standards
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

ORDERING GUIDE

Example: REL22-N

Model #	Options
REL22	
REL22	(blank) : Wide lens -N : Narrow lens

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.

3/10/22 R2



LED Lamp

Other Components





RP LIGHTING · FANS

REL22 Series

120/277V

Spacing Information

REL21WH / REL21BK / REL22 / REL23-SD / REL21-C / REL23-SD-C

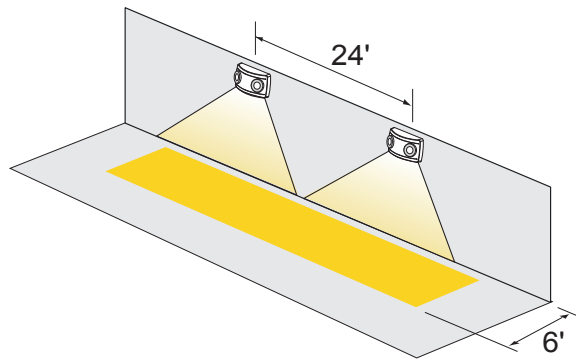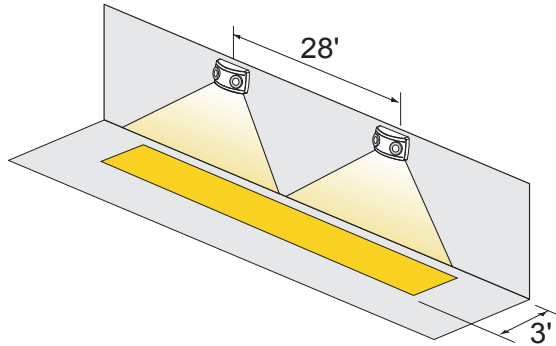

REL21-N / REL22-N / REL23-N-SD / REL23-N-SD-C

