


8115HA

120/277V

Catalog #:		Type
Project:		Date
Prepared by:		

6" LED New Construction Recessed Down light

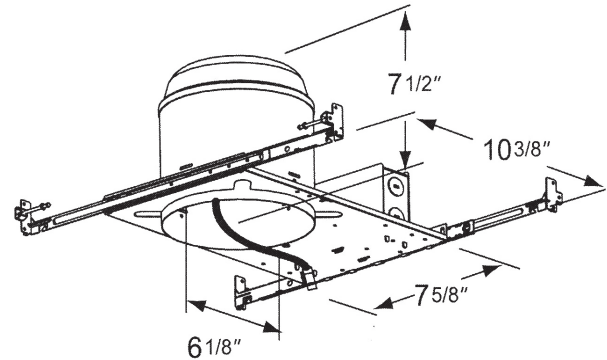

6" LED New Construction

DESCRIPTION

An ideal solution for efficiency, safety, and flexible design aesthetics. The 8115HA LED new construction housing is for use in shallow ceilings where 2"x8" joist construction is used and can be in direct contact with ceiling insulation. This 8115HA balances efficiency and cost to bring you the options needed to complete a variety of residential or commercial projects with a reliable and modern LED down light solution.

DESIGN FEATURES

Housing

- Sturdy aluminum construction
- Suitable for use in new construction applications
- Adjusts to accommodate 1" ceiling thickness
- IC Rated for direct contact with insulation
- 7.5" height allows use in 2" x 8" joist construction

Junction Box

- J-Box is listed for through-branch circuit wiring (4 in - 4 out) and seven 1/2" knockouts and four nonmetallic cable knockouts with strain clamps
- 3 port quick connectors preinstalled in J-box.

Hanger Bars

- Pre-installed bar hangers allow the housing to be positioned at any point within a 24" joist span
- Bar hangers can be turned 90° on the plaster frame
- Bar hangers are designed to fit T-bar spine without additional clamps for use in drop ceilings
- Pre-installed captive nails on bar hangers

Dimensions (L x W x H)

- 12-7/16" x 7-5/8" x 5-5/8"

Electrical

- 120/277V
- Dimmable compatible with conventional dimming systems
- Suitable for use in wet locations

Certifications

- 5 year limited warranty
- cCSAus for wet location
- Meets Washington State energy code for restricted air flow requirements



8115HA

120/277V

Specification & Ordering

HOUSING

Example: 8115HA

Housing #	
	8115HA
	8115HA

MODULE/TRIM

Example: 8562-WH-80-3K-120

Module/Trim #	Finish	Color Rendering	CCT	Volatage
	8562-80			
	8562-80	WH : White BK : Black BN : Brushed Nickel OB : Oil Rubbed Bronze	-80 : 80CRI -3K : 3000 K -4K : 4000 K	-120 : 120V

MODULE/TRIM

Example: 8563-WH-90-3K-120

Module/Trim #	Finish	Color Rendering	CCT	Volatage
	8563-90			
	8563-90	WH : White CL : Clear BN : Brushed Nickel OB : Oil Rubbed Bronze	-90 : 90CRI -3K : 3000 K -4K : 4000 K	-120 : 120V -277 : 277V


MODULE/TRIM

Example: 8568-WH-90-3K-120

Module/Trim #	Finish	Color Rendering	CCT	Volatage
	8568-90			
	8568-90	WH : White BK : Black BN : Brushed Nickel OB : Oil Rubbed Bronze	-90 : 90CRI -3K : 3000 K -4K : 4000 K	-120 : 120V -277 : 277V


MODULE/TRIM

Example: 8522-WH-90-3K

Module/Trim #	Finish	Color Rendering	CCT	Volatage
	8522			
	8522	WH : White	-90 : 90CRI -3K : 3000 K -4K : 4000 K	-120 : 120V

MODULE/TRIM

Example: 8523-WH-90-3K

Module/Trim #	Finish	Color Rendering	CCT	Volatage
	8523			
	8523	WH : White	-90 : 90CRI -3K : 3000 K -4K : 4000 K	-120 : 120V

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.