


9243 Series

120V-60Hz

Catalog #:		Type
Project:		Date
Prepared by:		


Self-Testing GFCI Receptacle/ Outlet

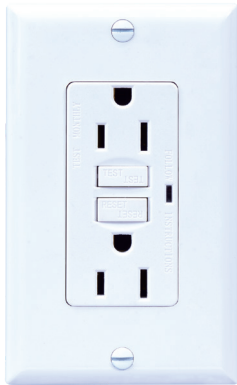

White



Ivory

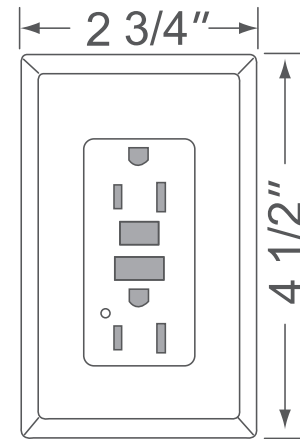

DESCRIPTION

This Self Testing GFCI Receptacle/Outlet is weather & tamper resistant and has the ability to detect when a ground fault may occur. When it does detect the ground fault, it shuts off the flow of electricity to deter potential accidents.

DESIGN FEATURES

Construction

- Includes one standard sized faceplate
- Durable impact-resistance thermoplastic faceplate and body
- Tamper resistant
- Rear pressure plate and side wiring
- Red LED indicator light alerts end-of-life

Electrical

- 15A & 20 Amp, 125V receptacle, 2 pole 3-wire
- 20A 125V feed-through
- Self-testing GFCI: Every 90 minutes
- End of life indicator: High brightness red LED light
- Operating temperature range: -35°C (-31°F) to 66°C (151°F)
- Operating humidity 30-95% humidity
- Wiring type 12 gauge to 14 gauge

Dimensions

- Height 4-1/2" x Width 2-3/4"
- Weight 4.55 ounces (.28lbs)

Finish

- Available in ivory or white

Certifications

- Meets UL943, cUL (CSA C22.2 NO.144), UL498 for receptacle
- UL, cUL listed
- Limited 2 Year Warranty

ORDERING

Example: 9243WW-15

Model #	Finish		AMPS
9243			
9243	IV	Ivory	-15
	WW	White	-20

