


4429
120V/277V

Catalog #:		Type
Project:		Date
Prepared by:		

LED Non-Cutoff Wall Pack

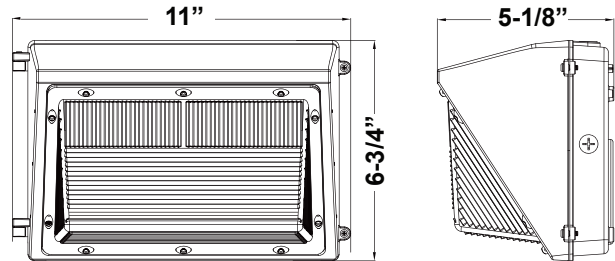

DESCRIPTION

An ideal choice for high efficiency outdoor illumination. Suitable for both new construction and remodel, the standard form factor allows for a direct replacement of inefficient, conventional wall packs without repainting. This classic design is primarily used to increase security and visibility in commercial and industrial applications.

DESIGN FEATURES

Construction

- Di-Cast Aluminum housing with hinged door frame
- Fully seated silicone gasket
- Clear Stippled Glass Lens for optimum distribution

Electrical

- Operating voltage 120V/277V
- Dimmable 0-10V
- 45W | 4050 lms delivered
- 50,000 hour projected life
- 5000K | 80 CRI
- Operating temperature: -30°C (-22°F) to +40°C (104°F)

Installation

- Wall mount
- Removable mounting bracket with built-in leveling bubble for easy, one-person installation

Dimensions

- 11" L x 6-3/4" W x 5-1/8" H

Certifications

- cCSAus Listed for wet location
- LED Light Engine: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

ORDERING GUIDE

Example: 4429OB-45-5K

Model #	Finish	Wattage	CCT
4429	OB		
4429	OB : Oil Rubbed Bronze	-45 45W	-5K : 5000K

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.



3/15/23 R3



RP LIGHTING · FANS

4429 - LED Non-Cutoff Wall Pack