


8708-3CCT

120V

Catalog #:		Type
Project:		Date
Prepared by:		

4" LED Round Retrofit Downlight 3CCT Selectable

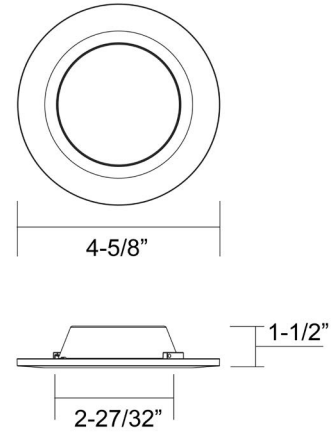

DESCRIPTION

A slim profile, small aperture downlight that fits in a 4" octagonal j-box with multiple trim-ring finish accessories. Wet location listing, IC rating, and wide distribution makes this an excellent choice for simple illumination in hallway and bathroom applications.

DESIGN FEATURES

Construction


- Durable aluminum construction
- Polycarbonate frosted lens

Electrical

- 120V-60Hz
- Dimmable TRIAC or ELV, 10-100%
- 50,000 hour projected life
- 90 CRI | 11W | 691 lms (delivered)
- 3CCT Selectable
- Beam Angle: 110°
- Operating temperature: 14°F - 104°F

Installation

- Simple and easy installation - light engine and trim connects via twist and lock
- Installs in 4" Octagonal ceiling j-box (min 2" depth); j-box supplied by others

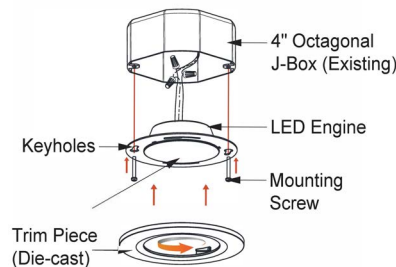

Die Cast Trim (sold separately)

- 4-JBR-BK: Black
- 4-JBR-BN: Brushed Nickel

Dimensions

- 4-5/8" x 31/32"

Certifications

- cSAus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- IC Rated
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

ORDERING GUIDE

Example: 8708WH-90-3CCT

Model #	Finish	CRI	CCT
8708	WH	-90	-3CCT
8708	WH : White	-90 : 90 CRI	-3CCT : Selectable 27K, 3K,35K
Accessory		Finish	
4-JBR-BK 4-JBR-BN		Black Trim Ring for 8708 Brushed Nickel Trim Ring for 8708	

For Square Trim, refer to 8709 Specification Sheet

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.



LED Lamps Other Components

6/26/24 R4

LIGHTING • FANS

8708-3CCT - 4" LED Round Retrofit Downlight 3CCT Selectable