




 **RP**
LIGHTING+FANS

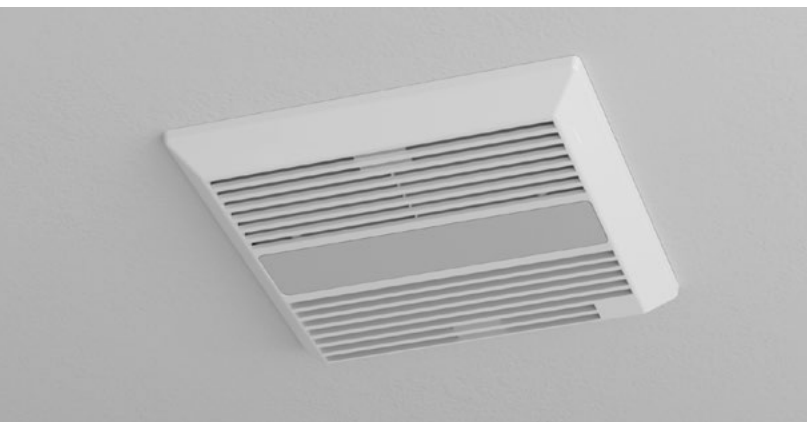

QUALITY

TRUST

EXPERTISE



SELECTION

STYLE

VALUE

Our For over 30 years, our expert staff has been building trusted relationships by providing industry-leading selection and stock of high quality lighting and fans. Our superior sourcing capabilities and distribution network allow our dedicated team to always deliver on-time and under budget—time and time again.

Whether your project is a large-scale 200 unit condo development, or a small design-forward commercial space, we have you covered for anything and everything your build throws at you.

We thank you for your business, and look forward to providing best-in-class service and assistance.

Our business succeeds when our long-standing partnerships succeed. We strive to create one with each and every one of our customers—no matter the size, location or specific project needs.

Sincere Thanks

– The RP Team

Product Overview



BVF50
Bath Fan
Pg. 6



BVF50L
Bath Fan Light Combo
Pg. 7



BVF70
Bath Fan
Pg. 8



BVF70L
Bath Fan Light Combo
Pg. 9



RXL6
Dual Color Exit Sign
Pg. 10



RXEL41
Dual Color Exit Sign
Pg. 11



RXEL42
Dual Color Exit Sign
Pg. 12



REL8
Emergency Light
Pg. 13



REL9
Emergency Light
Pg. 14



REL10
Outdoor Emergency Light
Pg. 15



CM-12WH
Fan Medallion
Pg. 16

BVF50



Non-Electrical



BATH EXHAUST FAN

Bath Fan

26 Gauge Galvanized Steel | Polymeric Resin Grille
 3" Detachable Exhaust Polymeric Collar Included
 ETL and HVI certified

PERFORMANCE

MODEL #	CFM	SONES
BVF50	50	4.5

DIMENSIONS

BVF50
 H: 3-5/8" | W: 7-1/2" | D: 7-1/4"
 Exhaust: 3"
Grille
 W: 8-1/2" | D: 9-3/8"

ORDERING GUIDE

Example: BVF50

MODEL #	GRILLE FINISH
BVF50	WHITE

BVF50L



Non-Electrical



Bath Fan | Built-In Light Kit

26 Gauge Galvanized Steel | Polymeric Resin Grille

4" Detachable Exhaust Polymeric Collar Included

Built-in Overload Disconnect


ETL and HVI certified

BATH EXHAUST FAN

PERFORMANCE

MODEL #	CFM	WATTS	LUMENS	SONES
BVF50L	50	11W	880	4.5

DIMENSIONS

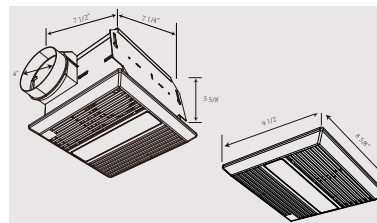

BVF50L

H: 5-5/8" | W: 7-1/2" | D: 7-1/4"

Return Duct: 4"

Grille

W: 9-1/2" | D: 8-5/8"

ORDERING GUIDE

Example: BVF50L

MODEL #	GRILLE FINISH
BVF50L	WHITE

BVF70



Non-Electrical



BATH EXHAUST FAN


Bath Fan

26 Gauge Galvanized Steel | Polymeric Resign Grille
 4" Detachable Exhaust Polymeric Collar Included
 ETL and HVI certified

PERFORMANCE

MODEL #	CFM	SONES
BVF70	70	5.5

DIMENSIONS

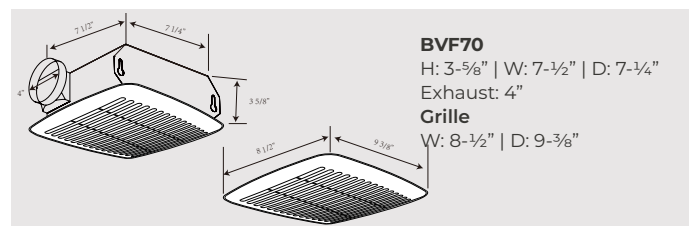

ORDERING GUIDE

Example: BVF70

MODEL #	GRILLE FINISH
BVF70	WHITE

BVF70L



Non-Electrical



Bath Fan | Built-In Light Kit

26 Gauge Galvanized Steel | Polymeric Resin Grille
 4" Detachable Exhaust Polymeric Collar Included
 ETL and HVI certified

PERFORMANCE

MODEL #	CFM	WATTS	LUMENS	SONES
BVF70L	70	11W	880	6.0

DIMENSIONS

BVF70L
 H: 5-5/8" | W: 7-1/2" | D: 7-1/4"
 Exhaust: 4"
Grille
 W: 9-1/2" | D: 8-5/8"

ORDERING GUIDE

Example: BVF70L

MODEL #	GRILLE FINISH
BVF70L	WHITE

RXL6



Non-Electrical



EXIT / EMERGENCY LIGHTING

Dual Color LED Exit Sign | Self-Diagnostic & Remote Control Options


Injection-molded thermoplastic housing
120/277VAC 60Hz dual voltage input optional

Battery low voltage protection | Test switch and battery charging indicator
Maintenance free Ni-cad battery | 24 hour recharge, more than 90 mins discharge

Suitable for wall, side and ceiling mount | Universal J-Box mount pattern on back plate
Field selectable Red or Green sign with matched color diffuser

UL Listed | ADA Compliant | Damp Listed | CEC Title 20 Compliant | Non-Electrical: 1 Year Limited

DIMENSIONS

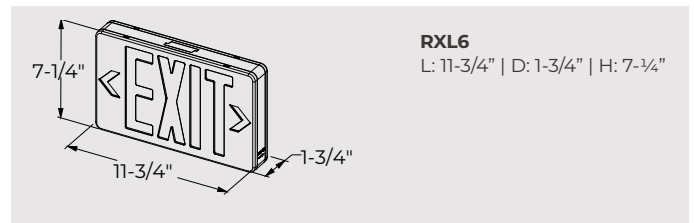

ORDERING GUIDE

Example: RXL6RGW

MODEL #	COLOR	OPTIONS
RXL6	RGW – Dual Red/Green Lettering with White Body	-SD - Self-Diagnostic -RC - Remote Control

RXEL41



Non-Electrical



Two Light Dual Color LED Exit Sign | Self-Diagnostic & Remote Control Options

Injection molded thermoplastic ABS housing | Two fully adjustable round shape light heads
120 to 277VAC 50/60Hz universal voltage operation | Test switch and charge rate indicator.

3.6V long life, maintenance free, rechargeable high temperature Ni Cad battery.
24/48 hours recharge after 90 minutes discharge.

Suitable for wall, ceiling and side mount | Universal J Box mounting pattern on back plate


Field selectable Red or Green sign with matched color diffuser

UL Listed | ADA Compliant | Damp Listed | CEC Title 20 Compliant | Non-Electrical: 1 Year Limited

PERFORMANCE

MODEL #	LUMENS	WATTS	VOLTAGE
RXEL41	200	2 x .8W	120/277

DIMENSIONS

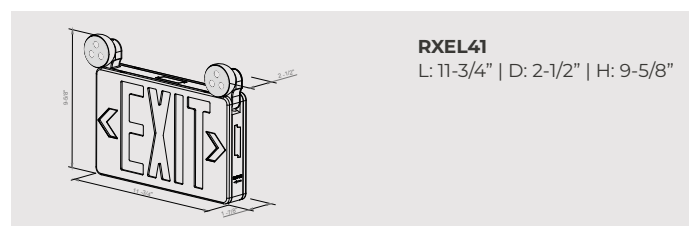

ORDERING GUIDE

Example: RXEL41RGW-SD

MODEL #	COLOR	OPTIONS
RXEL41	RGW - Dual Red/Green Lettering with White Body	-SD - Self-Diagnostic -RC - Remote Control

RXEL42



Non-Electrical



EXIT / EMERGENCY LIGHTING

Two Light Dual Color LED Exit Sign | Self-Diagnostic Option

Injection molded thermoplastic housing
Solid State transfer circuit | Test switch and battery charging indicator

Maintenance free Ni cad battery | 24 hour recharge, more than 90 mins discharge


Suitable for wall and ceiling mount | Universal J Box mounting pattern on back plate
Field selectable Red or Green sign with matched color diffuser

UL Listed | ADA Compliant | Damp Listed | CEC Title 20 Compliant |
Non-Electrical: 1 Year Limited Warranty

PERFORMANCE

MODEL #	LUMENS	WATTS	VOLTAGE
RXEL42	160	2 x .75W	120/277

DIMENSIONS

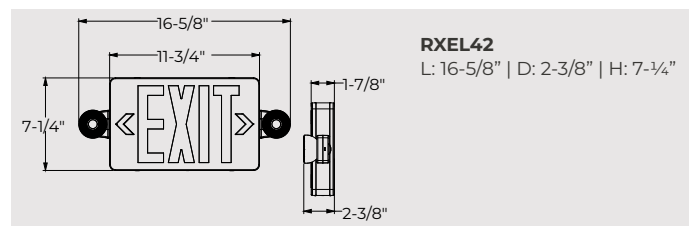

ORDERING GUIDE

Example: RXEL42RGW-SD

MODEL #	COLOR	OPTION
RXEL42	RGW - Dual Red/Green Lettering with White Body	-SD - Self-Diagnostic

REL8



Non-Electrical



Dual Lamp Emergency Light | High Output & Remote Control Optional

Injection molded thermoplastic ABS housing | Universal J box mounting pattern
Top knockout for conduit applications

Charge 24hours, discharge 100 minutes

REL8: Ni-cad battery

REL8HO: LiFePO4 battery

ADA Compliant | Damp Listed | UL Listed | CEC Title 20 Compliant


Non-Electrical: 1 Year Limited Warranty

EXIT / EMERGENCY LIGHTING

PERFORMANCE

MODEL #	LUMENS	WATTS	CCT	VOLTAGE
REL8	240	1W	5700K	120/277
REL8-RC	240	1W	5700K	
REL8HO	400	1.8W	5000K	

DIMENSIONS

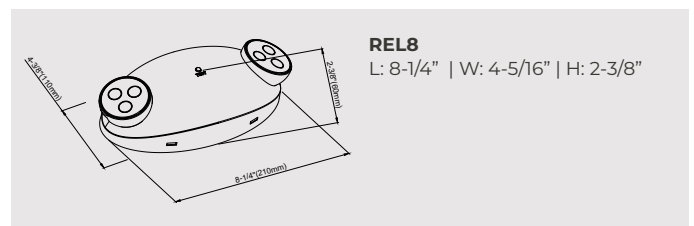

ORDERING GUIDE

Example: REL8-RC

MODEL #	FINISH	OPTIONS
REL8	WHITE	HO - High Output -RC - Remote Control

REL9



Non-Electrical



Dual Lamp Emergency Light | High Output & Remote Control Optional

Injection molded thermoplastic ABS housing
LiFePO4 battery | 24 hours recharge after 90 minutes discharge


ADA Compliant | Damp Listed | UL Listed | CEC Title 20 Compliant
Non-Electrical: 1 Year Limited Warranty

EXIT / EMERGENCY LIGHTING

PERFORMANCE

MODEL #	LUMENS	WATTS	CCT	VOLTAGE
REL9	500	2 x 2.7W	5700K	120/277
REL9-RC	500	2 x 2.7W	5700K	
REL9HO	1590	2 x 5.4W	5000K	

DIMENSIONS

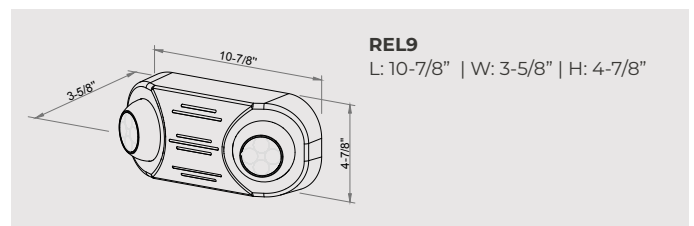

ORDERING GUIDE

Example: REL9-RC

MODEL #	FINISH	OPTION
REL9	WHITE	HO - High Output -RC - Remote Control

REL10



Non-Electrical



Dual Lamp Emergency Light | HO & Remote Control Optional

Polycarbonate material and waterproof design suitable for wet location

LiFePO4 battery | 24 hour recharge after 90 minutes discharge

ADA Compliant | Damp Listed | UL Listed | CEC Title 20 Compliant
Non-Electrical: 1 Year Limited Warranty

EXIT / EMERGENCY LIGHTING

PERFORMANCE

MODEL #	LUMENS	WATTS	CCT	VOLTAGE
REL10-W	630	2 x 2.7W	5000K	120/277
REL10-RC-W	630	2 x 2.7W	5000K	
REL10HO-W	1450	2 x 5.4W	5000K	

DIMENSIONS



ORDERING GUIDE

Example: REL10-RC-W

MODEL #	OPTIONS	FINISH
REL10	HO - High Output -RC - Remote Control	-W - White

CM-12WH



16" Ceiling Fan Medallion Accessory

DIMENSIONS



CM-12WH
Dia.15-1/2" | H: 3/4"

ORDERING GUIDE

Example: CM-12WH

MODEL #	COLOR
CM-12WH	WHITE

Index

Bath Fans

BVF50	6
BVF50L	7
BVF70	8
BVF70L	9


Exit/Emergency Lights

REL8	13
REL9	14
REL10	15
RXEL41	11
RXEL42	12
RXL6	10

Ceiling Fan Accessory

CM-12WH	16
---------------	----







RP Lighting + Fans © 2025

105 Declaration Dr,
McDonough, GA 30253
(678) 432-6190 | RPLighting.com